

VZ Run-on-Timers



All connections inside dotted lines to be mounted within equipment or an enclosure.

Timer Settings: VZ24C

Start delay can be set between 0 and 150 seconds with increments of 10 seconds (right-hand screw Tv). The factory setting is the medium setting.

Run-on adjustable from 1.5 to 24 minutes with increments of 1.5 minutes (left-hand setting screw Tn). The factory setting is the medium setting.

VZ6

Fixed start delay set at 50 seconds.
Run-on fixed at 6 minutes


Important:

Because terminals are still live when fan is turned off, loose warning label must be fixed on outside of enclosure.

Specifications:

220/240V ~ 50/60Hz
Maximum current - 1.25 A
Minimum current - 0.075 A
Protection class - Ip40

Electrical Certificate of Suitability
No.: CS/1039/2

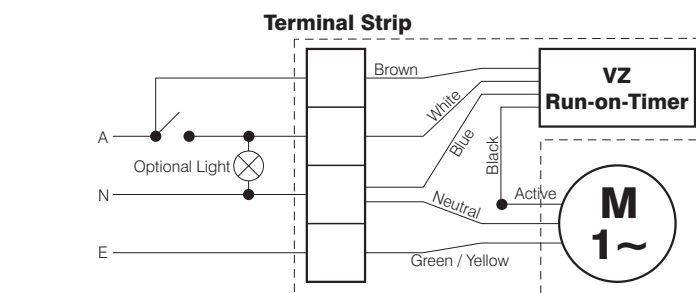

Part no. : INST - VZ