# LOUVRES - TYPE SLIMFIT DPL



## DESCRIPTION

The Slimfit external louvre grille has been specifically designed to fit directly onto the spigot of an EDM-300 fan so that it can be installed into narrow walls. The louvre grille and fan

combination enables installations into walls from 99mm to 130mm. By using the optional, purpose designed Spacer Plate (up to 3), installations into walls from 45mm to 98mm thick are possible.

### **Typical Applications**



Louvre

Ideal for installations that use various types of sandwich wall panel, ie mining accommodation huts (Dongas), portable homes, portable site offices and portable toilets.

#### **Features**

- Spacer Plate can be mounted on exterior or interior wall.
- Made from UV-stabilised ABS Plastic.
- Comes with flywire mesh sheet to eliminate entry of insects.
- · Can also be used in thicker walls or ducted applications using wall tube or flex duct.
- Available with 150mm spigot only.

#### Construction

Made from UV-stabilised ABS Plastic

#### Testing

Air flow tests based on ISO5801:2007

#### **Special Note**

Where fitted to wall fans with butterfly wing style backdraft dampers that open past the end of the spigot, the backdraft damper may be obstructed if the louvre grille is directly connected to the spigot. A wall tube or duct spacer should be used.

### SUGGESTED SPECIFICATION

The external louvre grille shall be of the Slimfit DPL type as designed and manufactured by Fantech Pty Ltd.


It shall fit directly onto the spigot of an EDM-300 fan to enable installations into walls from 99mm to 130mm. A Spacer Plate must be available to enable installations into walls from 45mm to 98mm thick. Both louvre grille and Spacer Plate shall be made from UV-stabilised ABS Plastic. A flywire mesh sheet must be incorporated into the grille.

Dimensions in mm


Scan the QR Code to view more information online.




# PRESSURE LOSS GRAPH



#### DIMENSIONS



# INSTALLATION

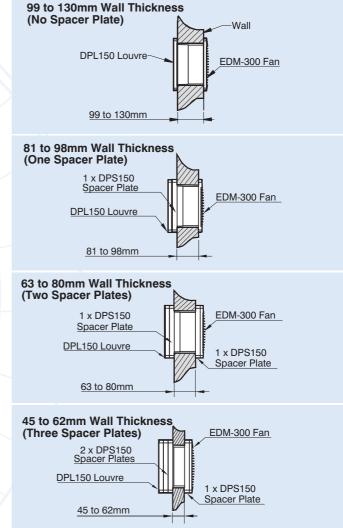

**DUCTING, LOUVRES & GRILLES**