
## **DIMENSIONS**



Model	Dimensions, mm			DØ	
Number	Α	В	С	Min	Max
HV-150	230	251	110	185	190
HV-230	300	325	142	259	262
HV-300	368	403	150	327	330



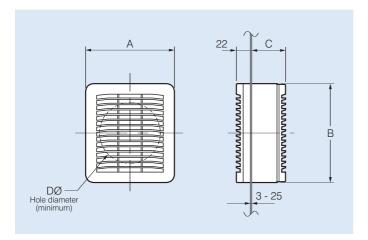

# **SRS - REVERSING SWITCH**




## **FEATURES**

The SRS Reversing Switch enables the HV-230AE and HV-300AE Stylvent fans to operate in both supply and exhaust modes.

The SRS Reversing Switch is surface mounted, has an enclosure rating of IP30 and has a 70W  $\times$  114H switch plate.

A recess depth of 25mm is required for mounting.

## **WIRING DIAGRAM**



#### Note:-

- 1. Remove link at fan terminal strip
- 2. Fan is double insulated
- no earth required.

# **WEATHER CAP**



## **FEATURES**

Optional external weather cap to suit Stylvent fans for exposed wall mounted locations, provides additional protection against high wind and rain.

Also suitable for roof mounting on skylights and atriums.

## Features include:

- low profile design
- available as a separate component
- fan is removable without disturbing Weather Cap
- reduction of wind noise
- bird mesh fitted as standard

**HV-150CAP** - suits HV-150AE fan **HV-230CAP** - suits HV-230AE fan **HV-300CAP** - suits HV-300AE fan

## **HOW TO ORDER**

